

D-3G


VdS (G4920027)

FM
APPROVED 31- 173mm


IFH KOT-2019/0808
KOT-2023/2345



15 - 129



133 - 316



D-3G Silikon


VdS (G4950064)

FM
APPROVED 24 - 171mm

IFH KOT-2019/0808



14 - 115



124 - 305



D-3G z wkładką izolacyjną

FM
APPROVED 29 - 162mm



IFH KOT-2019/0808



14 - 115




124 - 318




NT 3G



D-3G		D-3G silicon/rubber		Md
[mm]	Fmax	[mm]	Fmax	
15 - 30	2,0 kN	14 - 23	1,8 kN	2Nm
31 - 72	5,0 kN	24 - 65	2,0 kN	2Nm
76 - 129	5,0 kN	67 - 115	2,0 kN	3Nm
133 - 173	8,0 kN	124 - 162	2,9 kN	5Nm
176 - 225	12,5 kN	165 - 214	3,5 kN	10Nm
244 - 316	12,5 kN	219 - 318	7,5 kN	10Nm

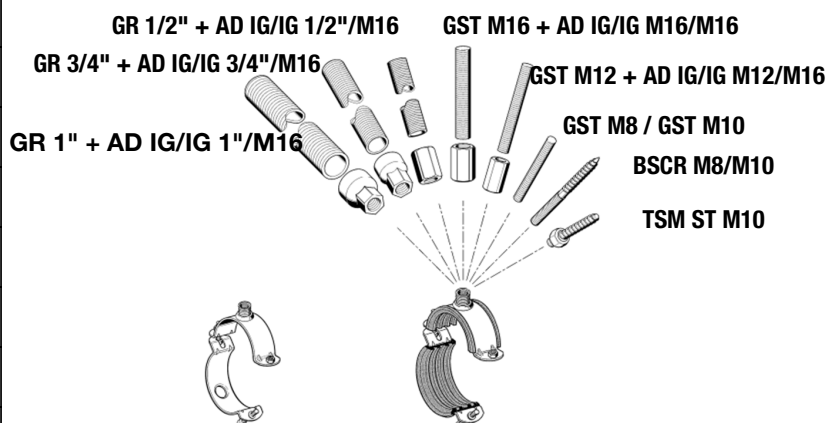

Md

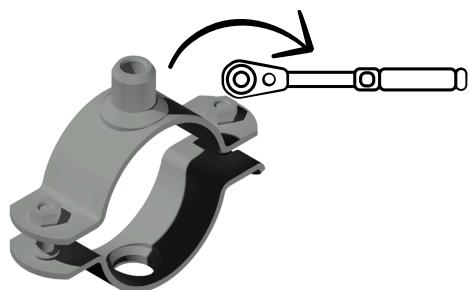

D-3G rubber				
[mm]	FWD 30	FWD 60	FWD 90	FWD 120
14 - 23	380 N	200 N	140 N	-
24 - 65	500 N	250 N	170 N	120 N
67 - 115	1000 N	650 N	500 N	400 N
124 - 162	2200 N	1200 N	850 N	600N
165 - 305	2400 N	1400 N	1000 N	850 N